
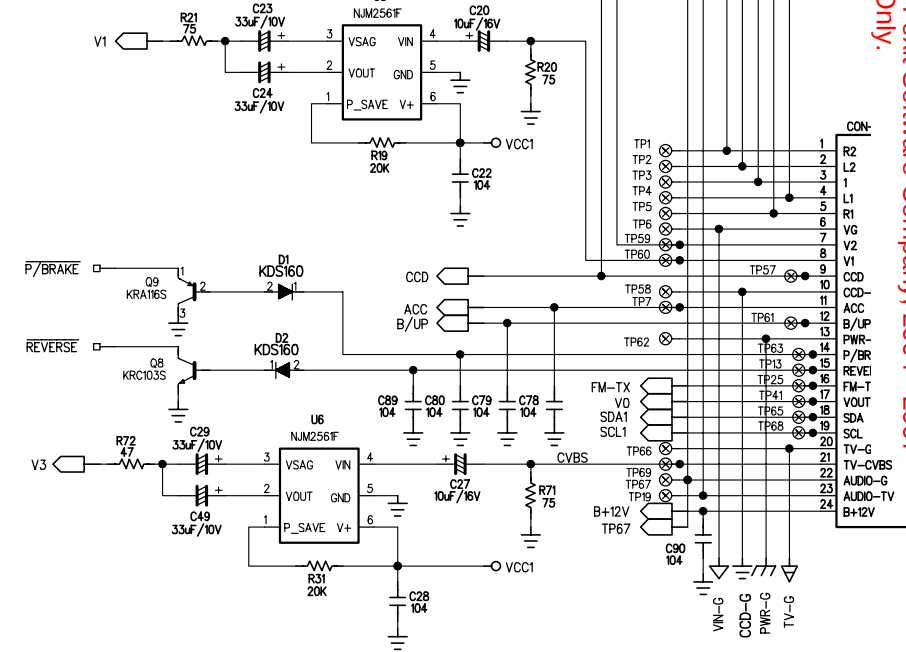
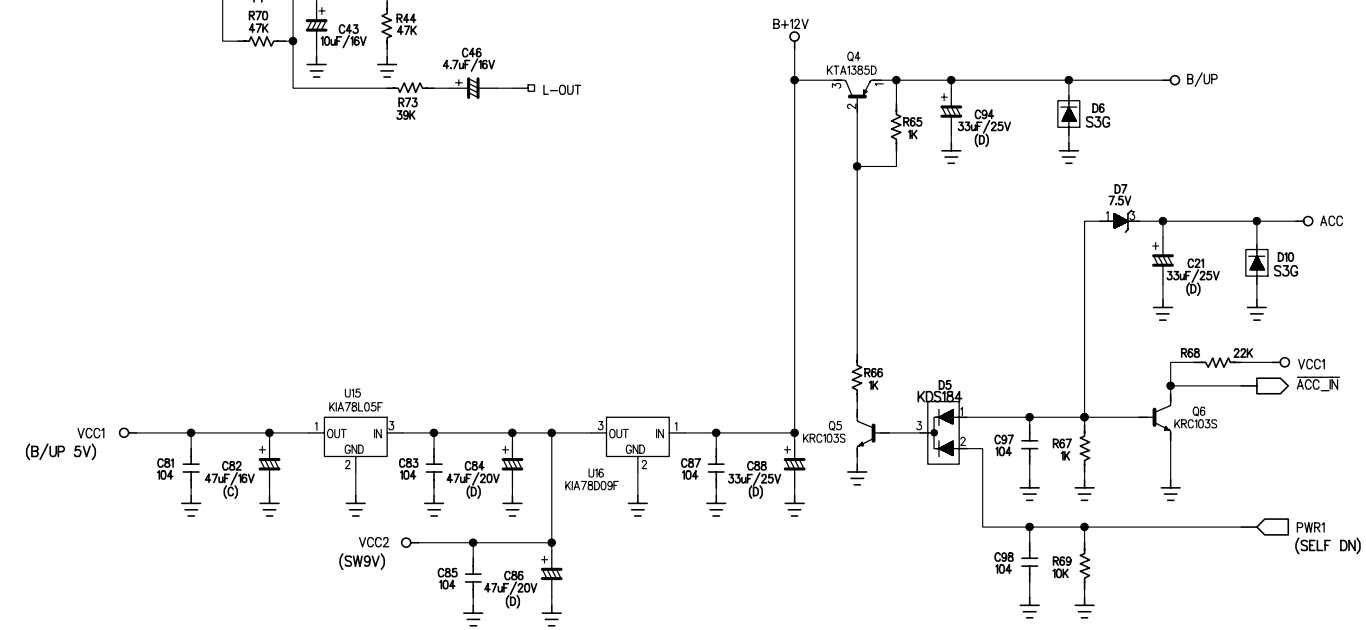
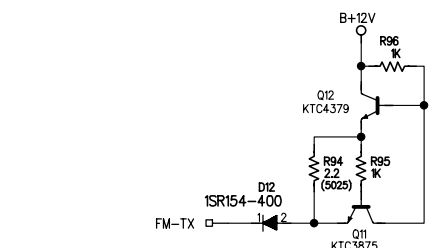
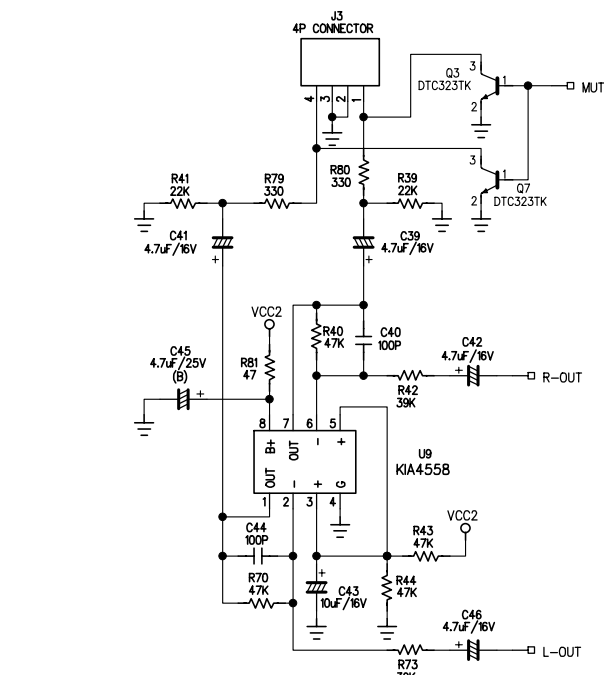
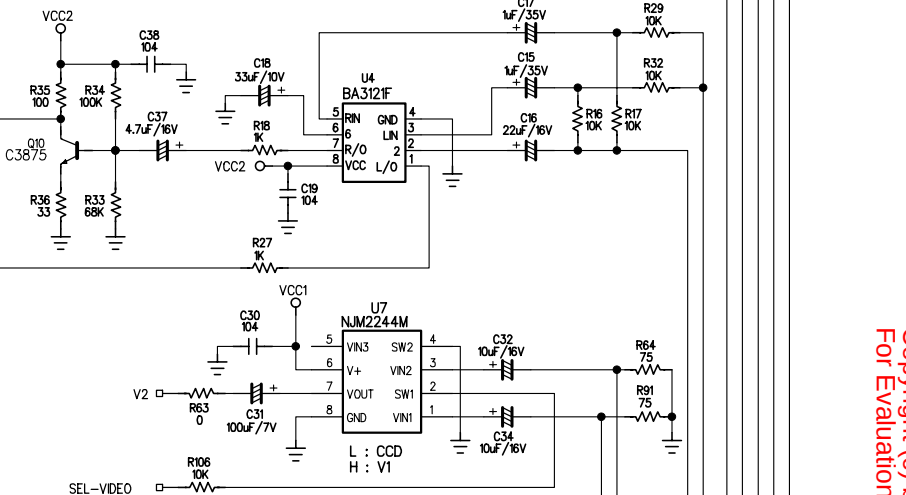
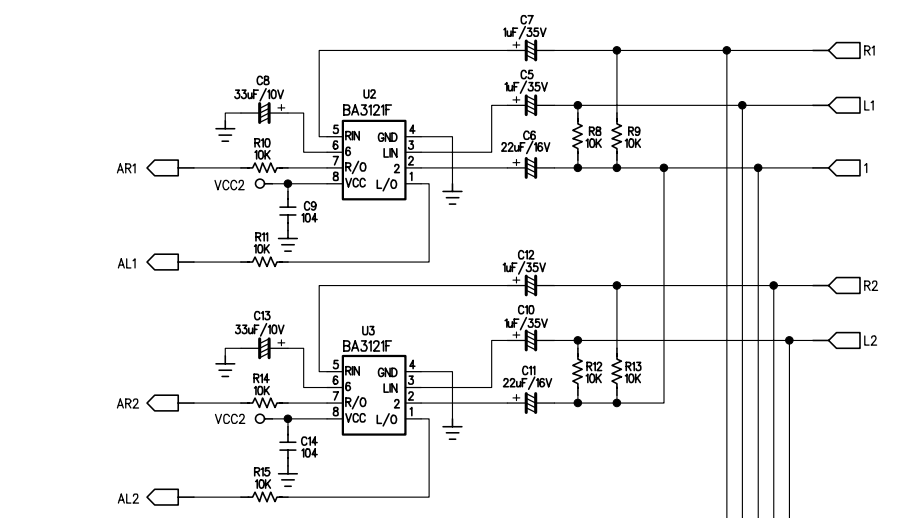
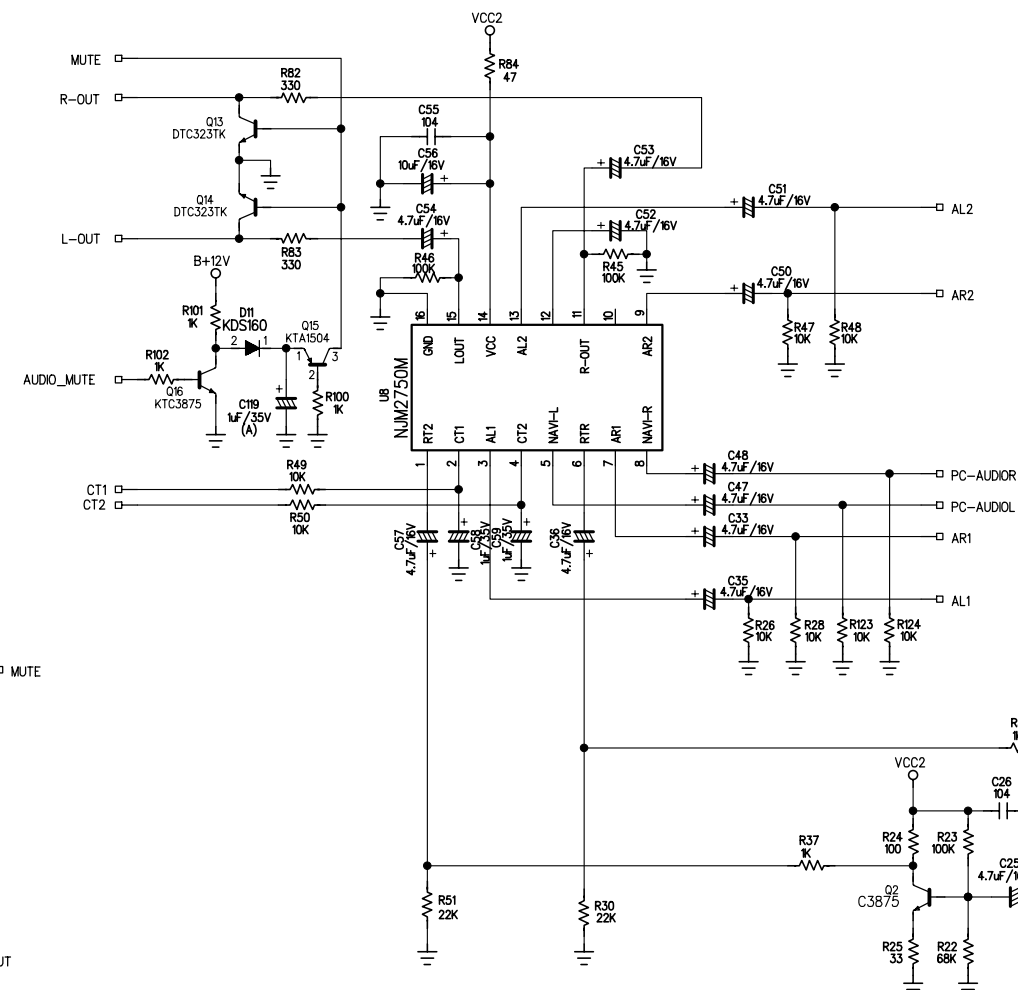
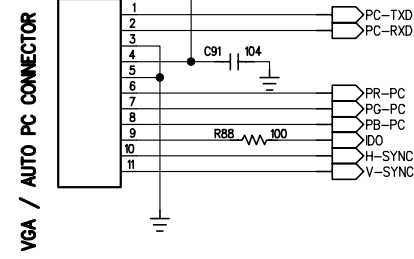
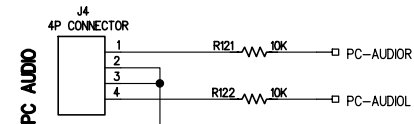


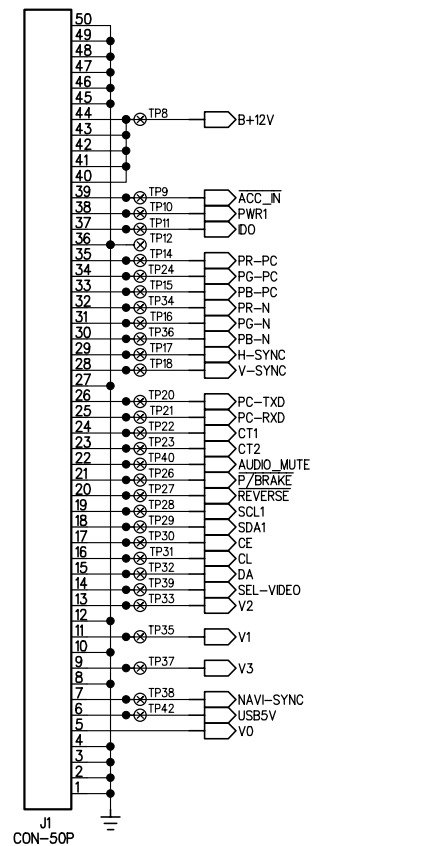

MODEL : DAH700M(PAL)		
NAME :	MAIN PCB	Rev. 1.5
Date: 2006.10.26	Sheet : 1 of 1	
















Edited by Foxit PDF Editor
Copyright (c) by Foxit Software Company, 2004 - 2007
For Evaluation Only.

MODEL : DAH700M

NAME : MONITOR PCB Rev. 1.8

Date: 2006.10.26 Sheet : 1 of 1

REMOCON SENSOR
SUB_PCB_ASSY

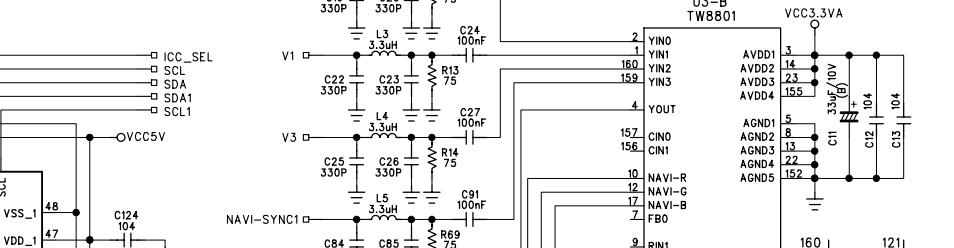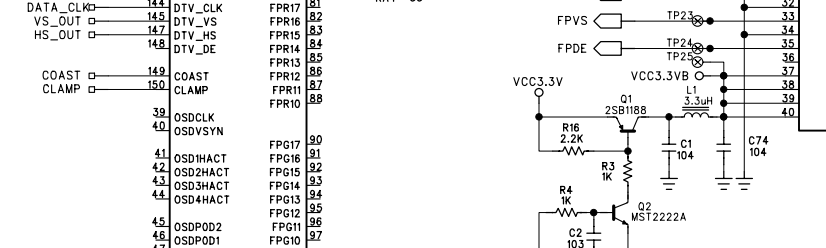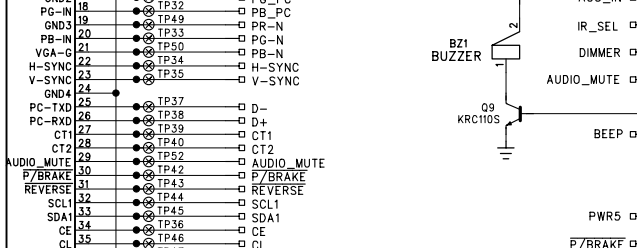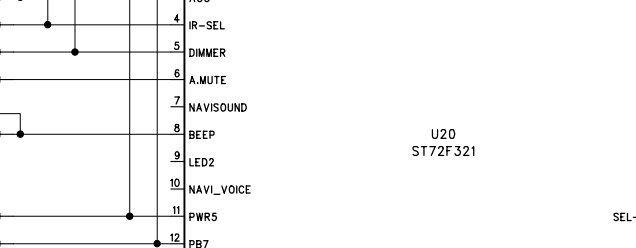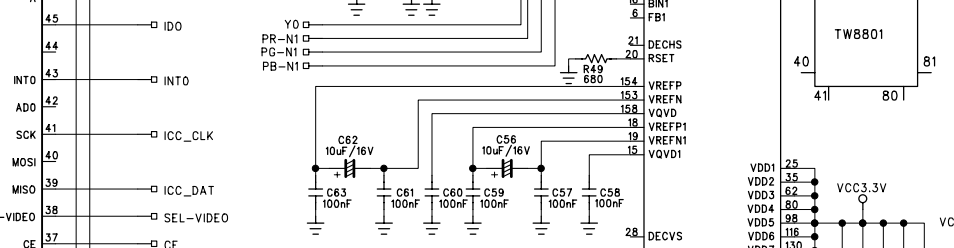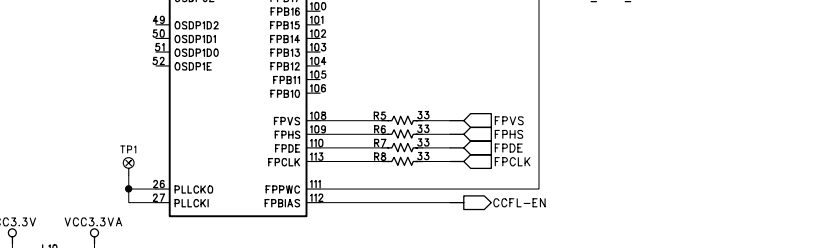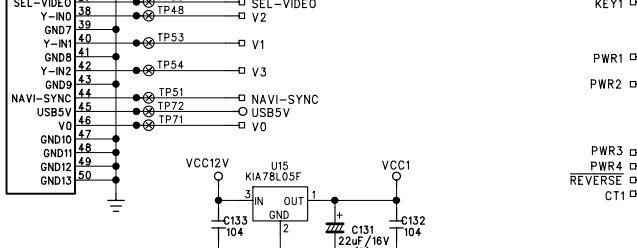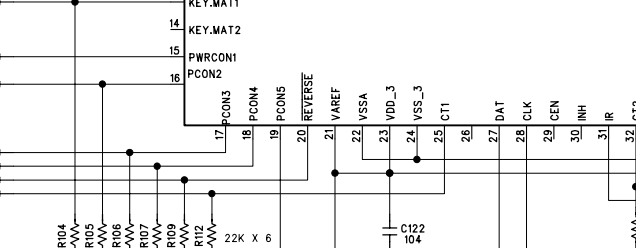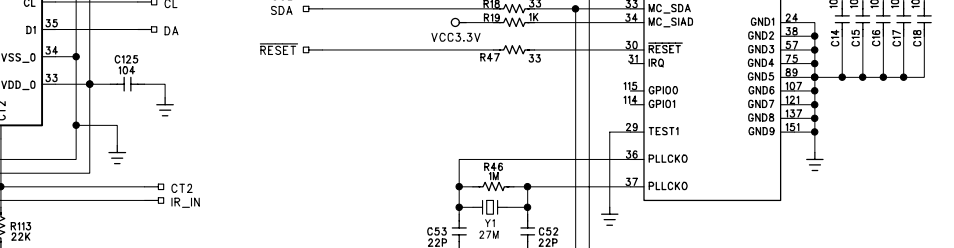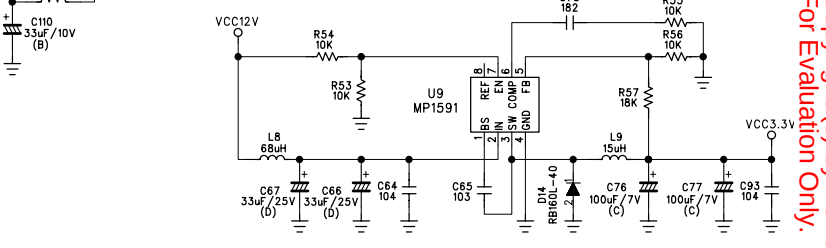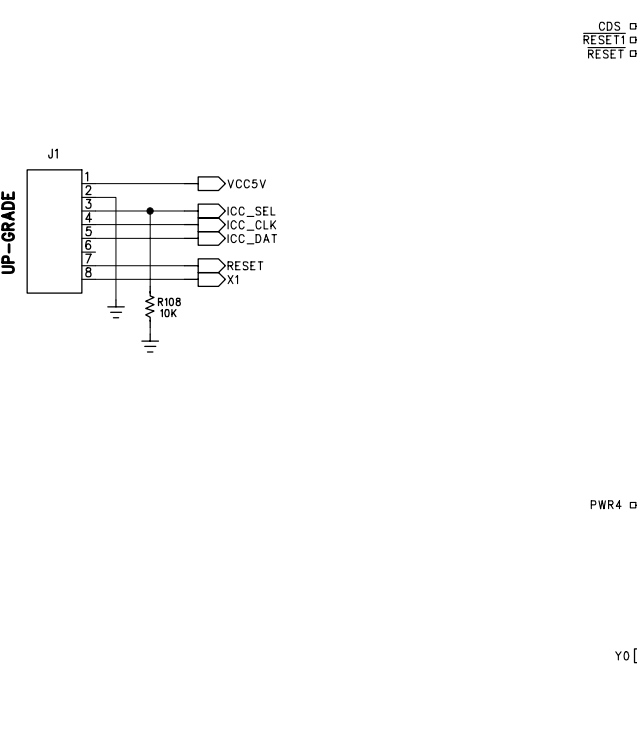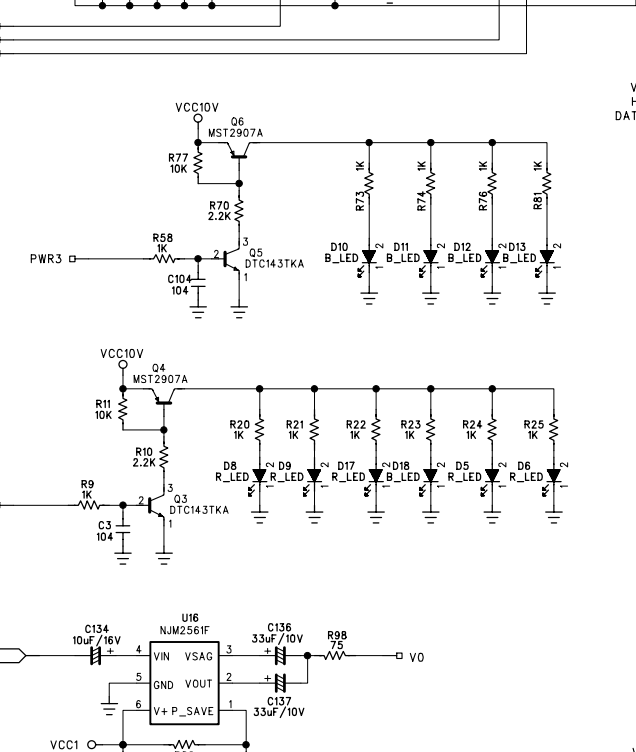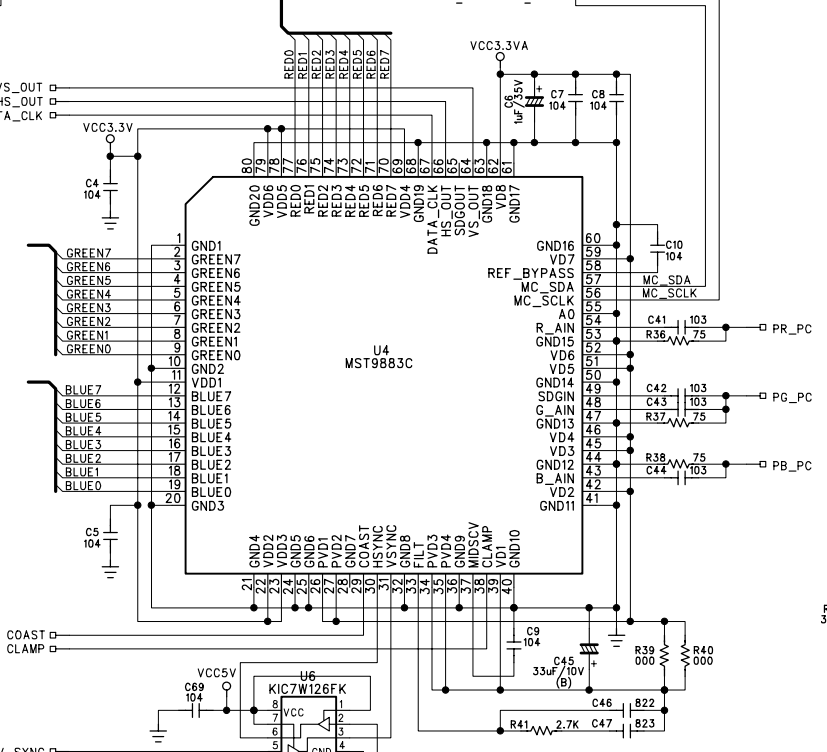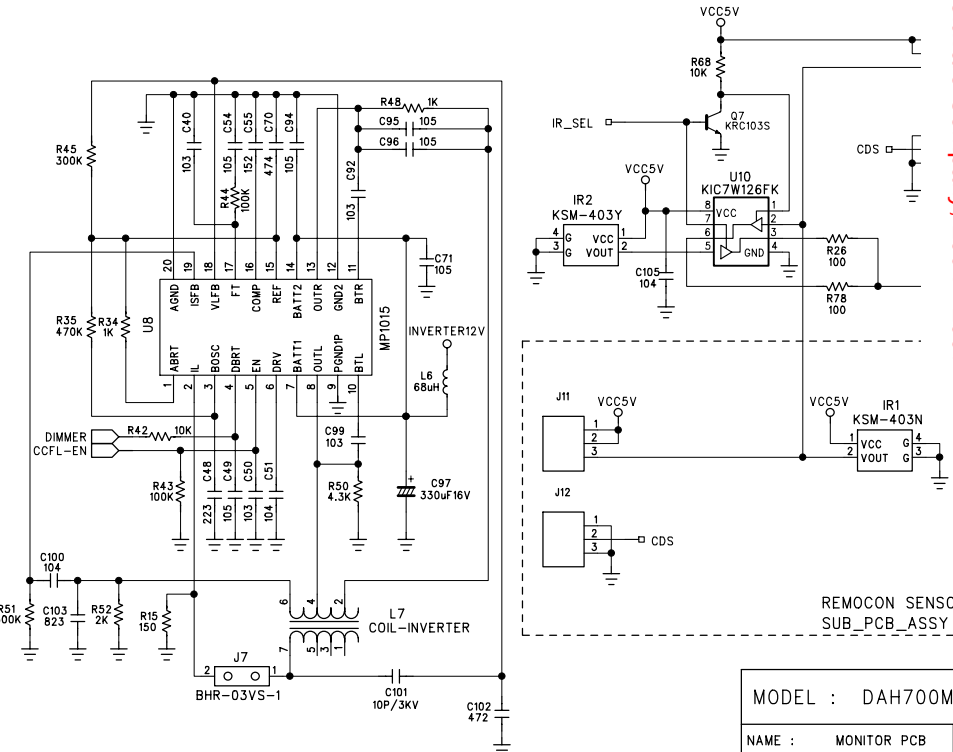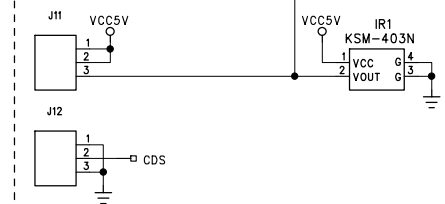

BOM for PCM-750T

LEVEL	PART NO	DESCRIPTION	SPECIFICATION	Q'TY
1-----	C2T130	DTM-203	CAR DVD TILT (HALF DIN)	1.000000
1-----	U418C1	ASS'Y REMOCON	DAH-700M (VIDEOVOX)	1.000000
2-----	TG44C0	BAG POLY P.E	140X80X0.05T REMOCON(1)	1.000000
2-----	UG12B0	PAD SILK ON BUTTON	DAH-700M	1.000000
2-----	UI28C0	UPPER COVER	ABS BLACK/DAH-700M (VIDEOVOX)	1.000000
2-----	VI39A0	UNDER COVER	ABS GRAY	1.000000
2-----	VI40B0	BATTERY HOLDER	SCD-8000	1.000000
2-----	VX69A0	BATTERY TERMINAL 'A'	SCD-8000	1.000000
2-----	VX70A0	BATTERY TERMINAL 'B'	SCD-8000	1.000000
2-----	VY58A0	SRW PH T2 2X5 (BK)	PH T2 2X5 (BK)	3.000000
2-----	WZ18A0	BATTERY (LI BATTERY)	SCC-6000,CR2025 (3V)	1.000000
2-----	Y438A1	ASS'Y REMOCON KID'S PCB	DAH-700M	1.000000
3-----	TE76A0	CAP EL RM 16V 4.7 SRE	RM16V 4.7SRE	1.000000
3-----	VE39A0	IR LED SI3311-H	3PI	1.000000
3-----	VR08A0	RESONATOR OCR455B1	REMOCON	1.000000
3-----	VX69B0	BATTERY TERMINAL (A)	REMOCON	1.000000
3-----	VX70B0	BATTERY TERMINAL (B)	REMOCON	1.000000
3-----	Y439A1	ASS'Y REMOCON KID'S PCB C	DAH-700M (VIDEOVOX)	1.000000
4-----	JE35A0	CAP CE CS (2012)50V 101(C	MCH215A101JK	2.000000
4-----	PD03A0	DID /S CS DAN212K	DAN212K	1.000000
4-----	TI72A0	IC KS51840-78D	S3C1840D78-SMB0	1.000000
4-----	VT21A0	TR CS KTC3265-Y	NPN Power (SOT-23) / 2SD1781K-R	1.000000
4-----	VV16A0	RES CFCS (2012) 1/8 1	0.1W 1 OHM	1.000000
4-----	YB15B0	PCB REMOCON KID'S	DAH-700M	1.000000
1-----	U419C1	ASS'Y MAIN	DAH-700M (W/OUT FM-TX)	1.000000
2-----	UA12A0	CABLE 11P ASS'Y	D-SUB & USB (DAH-700M)	1.000000
2-----	UA13A0	CONT 4P+4P RCA JACK ASS'Y	LINE OUT & A-IN (DAH-700M)	1.000000
2-----	UE07A0	FLEXIBLE PCB 50P (175m/m)	50PX175XP7X0.5 (MAIN+MONITOR)	1.000000
2-----	UP37A0	CVR BOTTOM (BLACK SPRAY)	SECC 1.0TX200X185	1.000000
2-----	U417C1	ASS'Y MAIN PCB CHIP	DAH-700M (W/OUT FM-TX)	1.000000
3-----	CV04A0	RES CFCS (1608) 1/10 39K	MCR03EZH J393	2.000000
3-----	DD02U0	DID /S CS KDS184	SOT23-KEC	1.000000
3-----	DD11U0	DID /S CS KDS160	USC (2.5X1.25)	3.000000
3-----	DV02A0	RES CFCS (1608) 1/10 33	MCR03EZH J 330	2.000000
3-----	DV03A0	RES CFCS (1608) 1/10 47	MCR03EZH J 470	3.000000
3-----	ID02A0	DID /R CS S3G	3A 400V (DO-214AB)	2.000000
3-----	II07A0	IC BA3121F-E2	GND Isolation Amp (SOP8)	3.000000
3-----	IV01A0	RES CFCS (5025) 1/2 2.2	MCR50JZH J	1.000000
3-----	KD11A0	DID /R CS 1SR154-400	400V 1A (PMDS 4.5X2.6)	1.000000

3----	KE11A0	CAP TANTAL 10V 33uF B (35	TMCMB1A336MTRF	7.000000
3----	KV06A0	RES CFCS (1608) 1/10 47K	MCR03EZH J 473	4.000000
3----	KV08A0	RES CFCS (1608) 1/10 22K	MCR03EZH J223	5.000000
3----	KV10A0	RES CFCS (1608) 1/10 100K	MCR03EZH J 104	4.000000
3----	KV11A0	RES CFCS (1608) 1/10 10K	MCR03EZH J 103	24.000000
3----	KV13A0	RES CFCS (1608) 1/10 1K	MCR03EZH J 102	12.000000
3----	KV20A0	RES CFCS (1608) 1/10 0	MCR03EZH J 0R0	1.000000
3----	LE82A0	TR CS DTC323TK	DTC323TK	4.000000
3----	NI68A0	IC NJM2750M	AUDIO SELECTOR (DMP16)	1.000000
3----	ST04A0	TR CS KRC103S	ROHM-DTC124EKA (SOT-23)	3.000000
3----	ST05A0	TR CS KTC3875S-Y	General Purpose (SOT-23)	4.000000
3----	ST06A0	TR CS KRA116S	ROHM-DTA113ZKA (SOT-23)	1.000000
3----	UA09A0	CONT W/B 12505WR-11A00	11P 1.25mmP ANGLE	1.000000
3----	UA10A0	CONT WAFER CP3524P1HST	24P SMT (CIVILUX)	1.000000
3----	UA16A0	CONT FFC 05002HR-50A02	50P 0.5mmP BOTTOM ANGLE	1.000000
3----	UB04B0	PCB MAIN (DAH-700M)	FR-4 164X82X1.0T	1.000000
3----	UD04A0	DID /Z CS Z02W 7.5V YRTK	200mW (SOT-23)	1.000000
3----	UI22A0	IC NJM2244M	SWH VIDEO (SOP-8)	1.000000
3----	UI34A0	IC KIA4558F	OP AMP (FLP-8)	1.000000
3----	UI35A0	IC KIA78D09F	LDO (DPAK)	1.000000
3----	UN02A0	CAP TANTAL 25V 33uF	D (7343)	3.000000
3----	UT06A0	TR CS KTA1385D	Switching (DPAK)	1.000000
3----	UT07A0	TR CS KTA1504S	General Purpose (SOT-23)	1.000000
3----	UT08A0	TR CS KTC4379	Power Amplfier (SOT-89)	1.000000
3----	VI43A0	IC KIA78L05F	5V 150mA REGULATOR (SOT-89)	1.000000
3----	YA17A0	CONT W/B 12505WR-04A00	4P 1.25mmP ANGLE	2.000000
3----	YIB0A0	IC NJM2561F1	VIDEO AMP (MPT6)	2.000000
3----	YK03A0	CAP CE CS (1608)25V 104PF	MCH182CN104KK	21.000000
3----	YK22A0	CAP CE CS (1608)50V 101PF	MCH185A101J	2.000000
3----	YN02A0	CAP TANTAL 16V 10uF A (32	TMCMA1C106MTRF	6.000000
3----	YN08A0	CAP TANTAL 35V 1uF	A (3216)TYPE	9.000000
3----	YN10A0	CAP TANTAL 16V 4.7uF	A (3216)TYPE	17.000000
3----	YN12A0	CAP TANTAL 16V 22uF	B (3528)TYPE	3.000000
3----	YN13A0	CAP TANTAL 16V 47uF	C (6032)TYPE	1.000000
3----	YN17A0	CAP TANTAL 7V 100uF	B (3528)TYPE 7V 100uF	1.000000
3----	YN20A0	CAP TANTAL 20V 47UF	D (7343)TYPE	2.000000
3----	YN23A0	CAP TANTAL 25V 4.7uF	B (3528)TYPE	1.000000
3----	YV03A0	RES CFCS (1608) 1/10 20K	MCR03EZHJ203	2.000000
3----	YV06A0	RES CFCS (1608) 1/10 68K	MCR03EZHJ683	2.000000
3----	YV08A0	RES CFCS (1608) 1/10 100	MCR03EZH J101	3.000000
3----	YV14A0	RES CFCS (1608) 1/10 75	MCR03EZHJ 750	5.000000
3----	YV20A0	RES CFCS (1608) 1/10 330	MCR03EZHJ 331	4.000000

2-----	VY41A0	SRW CH M2X2.2 (BK)	CH M2X2.2 (BK)	7.000000
2-----	YE19A0	FLEXIBLE PCB 10P (DAV-720	150m/m (TFT+MTR)	1.000000
1-----	U420D1	ASS'Y PACKING	DAH-700M VIDEOVOX (TV BOX)	1.000000
2-----	FR06A0	SRW T1 4X12 BK	T1 4X12 BK	4.000000
2-----	QR07A0	SRW BH M 2.6X3 NATURAL	BHM 2.6X3 NATURAL	4.000000
2-----	UA11A0	CONT 24P PWR ASS'Y	DAH-700M	1.000000
2-----	UG01C0	BOX GIFT	DAH-700M (VIDEOVOX)	1.000000
2-----	UG02C0	MANUAL	DAH-700M (VIDEOVOX)	1.000000
2-----	UG03C0	LBL SET	DAH-700M (VIDEOVOX)	1.000000
2-----	UG05B0	BOX C/T	DAH-700M	0.200000
2-----	UG06B0	BOX PAPER UPPER UNDER	DAH-700M	1.000000
2-----	UG07B0	PAD C/T BOX	DAH-700M	1.000000
2-----	UG10B0	POLY AIR	DAH-700M	1.000000
2-----	UG15A0	CD-R BLANK (700MB)	PC MODE MONITOR DRIVER	1.000000
2-----	UG16A0	CASE CD-R	VINYL-COTTON TYPE	1.000000
2-----	UI45A0	TRIM RING SPRAY	DAH-700M	1.000000
2-----	UP36A0	BKT MOUNT (BEN)	DAH-700M	2.000000
2-----	YA43A0	CABLE MINI DIN 8P 1.5M	DAV-720D (TV BOX)	1.000000
2-----	YJ04B0	ANT DIVERSITY (2EA)	STANDARD (DAV-720D)	2.000000
2-----	YR17A0	SRW CM 2X2.5 BK (WASHER)	CM 2X2.5 BK (WASHER)	2.000000
2-----	1339	P/BAG SRW	0.05TX50X30	1.000000
1-----	U430B1	ASS'Y MONITOR	DAH-700M (VIDEOVOX)	1.000000
2-----	CP46A0	BKT TFT CONT CVR	BLACK SPRAY	1.000000
2-----	UG14A0	LBL BLACK (120X9)	DAH-700M	1.000000
2-----	UI40A0	DECORATION PLT LCD (DAH-7	ABS BLACK/MATALIC GRAY SPRAY	1.000000
2-----	UI44A0	DECORATION WINDOW (DAH-70	ACRYL CLEAR	1.000000
2-----	UI49A0	TFT PANEL (PCM-750T)	ABS BLACK/BLACK SPRAY	1.000000
2-----	US20A0	BUTTON FUNCTION 'A' (PWR/	PC MILK	1.000000
2-----	US21A0	BUTTON FUNCTION 'B' (OSD/	PC MILK	1.000000
2-----	US22A0	BUTTON FUNCTION 'C' (CH D	PC MILK	1.000000
2-----	US23A0	BUTTON FUNCTION 'D' (TILT	PC MILK	1.000000
2-----	U431A1	ASS'Y MONITOR PCB	DAH-700M	1.000000
3-----	UE08A0	CAP EL RM 16V 330 MHA	P2.5 (6.3X11)	4.000000
3-----	U432A1	ASS'Y MONITOR PCB CHIP	DAH-700M	1.000000
4----	DC01U0	INDUCTOR CS FCI2012-3R3K	3.3uH	5.000000
4----	DK02U0	CAP CE CS (1608)50V 822PF	MCH185CN822KK	1.000000
4----	DK04A0	CAP CE CS (1608)50V 823PF	MCH185CN823KK	2.000000
4----	DK04U0	CAP CE CS (1608)16V 105PF	C1608X5R1C105K	6.000000
4----	DO05A0	RES ARRAY (1608X4) 33	MNR14E0ABJ 330 (3.2X1.6)	4.000000
4----	DV02A0	RES CFCS (1608) 1/10 33	MCR03EZH J 330	14.000000
4----	DV08U0	RES CFCS (1608) 1/10 4.3K	MCR03EZH J 432	1.000000
4----	DV12U0	RES CFCS (1608) 1/10 470K	MCR03EZHJ 474	1.000000

4----	KE11A0	CAP TANTAL 10V 33uF B (35	TMCMB1A336MTRF	5.000000
4----	KI62A0	IC BR24L16F-WE2	EEPROM (SOP8)	1.000000
4----	KV04A0	RES CFCS (1608) 1/10 1.5K	MCR03EZH J152	2.000000
4----	KV07A0	RES CFCS (1608) 1/10 2.2K	MCR03EZH J222	10.000000
4----	KV08A0	RES CFCS (1608) 1/10 22K	MCR03EZH J223	12.000000
4----	KV10A0	RES CFCS (1608) 1/10 100K	MCR03EZH J 104	2.000000
4----	KV11A0	RES CFCS (1608) 1/10 10K	MCR03EZH J 103	11.000000
4----	KV13A0	RES CFCS (1608) 1/10 1K	MCR03EZH J 102	18.000000
4----	KV15A0	RES CFCS (1608) 1/10 150	MCR03EZH J 151	1.000000
4----	KV17A0	RES CFCS (1608) 1/10 4.7K	MCR03EZH J 472	5.000000
4----	KV20A0	RES CFCS (1608) 1/10 0	MCR03EZH J 0R0	2.000000
4----	LE80A0	TR CS 2SB1188-Q	MEDIUM POWER (MPT3)	1.000000
4----	NI78A0	IC KIA7032AF	Voltage Detector (SOT-89)	1.000000
4----	PD06A0	DID /Z CS Z02W 10V YRTK	SOT-23	1.000000
4----	ST04A0	TR CS KRC103S	ROHM-DTC124EKA (SOT-23)	1.000000
4----	ST05A0	TR CS KTC3875S-Y	General Purpose (SOT-23)	3.000000
4----	UA01A0	CONT FFC 52207-0485	4P 1mmP SMD ANGLE TOP	1.000000
4----	UA16A0	CONT FFC 05002HR-50A02	50P 0.5mmP BOTTOM ANGLE	1.000000
4----	UB08A0	PCB MONITOR (DAH-700M)	FR-4 162X134X1.2T	1.000000
4----	UD05A0	DID /S CS KDS122	Ultra High Speed (USM)	4.000000
4----	UI36A0	IC FT232BL	USB UART (LQFP-32)	1.000000
4----	UI37A0	IC KIC7W126FK	DUAL BUS BUFFER (US8)	2.000000
4----	UI38A0	IC KSM-403E (3.3V, 37.9K	OPTIC RECEIVER MODULE (SMD-4P)	2.000000
4----	UI39A0	IC RS1044-1/SS	TOUCH CONTROLLER (SSOP-20)	1.000000
4----	UN02A0	CAP TANTAL 25V 33uF	D (7343)	2.000000
4----	UN03A0	CAP TANTAL 25V 22uF	D (7343)	1.000000
4----	UP35A0	PIN HEADER 20033WR-03A02	3P ANGLE 2mmP	2.000000
4----	US24A0	SWH TACT YTP-1243S	L=4.3 180gf 9.0mmP SMD	6.000000
4----	UT07A0	TR CS KTA1504S	General Purpose (SOT-23)	2.000000
4----	UZ04A0	X-TAL 27MHz (SMD,L=3.2)	STM-27.000-18-H3	1.000000
4----	UZ14A0	X-TAL CS 16MHZ (HC-49/S S	L1F16000-23O16D	1.000000
4----	UZ15A0	X-TAL CS 6MHz (HC-49/S SL	L1F060000-23O16D	1.000000
4----	VI43A0	IC KIA78L05F	5V 150mA REGULATOR (SOT-89)	2.000000
4----	VT10A0	TR CS DTC143TKA	SMT3	2.000000
4----	VT15A0	TR CS KRC110S	ROHM-DTC143TKA (SOT-23)	1.000000
4----	YA01A0	CONT W/B 20015WR-05A	PWR 2P ANG (SMT) INVERTER	1.000000
4----	YA40A0	CONT W/B 12505WS-08A00	8P 1.25mmP STR	1.000000
4----	YA42A0	CONT FFC 6240 40P P0.5mm	04-6240-040-003-800	1.000000
4----	YA45A0	CONT FFC 6239 10P P0.5mm	04-6239-010-001-800	1.000000
4----	YC19A0	INDUCTOR CS SHP0735P-680A	68uH 0.9A (7.5X7.5X3.5)	3.000000
4----	YC21A0	INDUCTOR CS SHP0735P-150A	15uH 2.1A (7.5X7.5X3.5)	1.000000
4----	YD05A0	DID /STK CS RB160L-40	Schottky barrier (PMDS)	1.000000

4----	YG28A0	POLY SWH (NANOSMD-C150-2)	1.5A SMD (3.2X1.6)	2.000000
4----	YIA4A0	IC TW8801	TW8801 (TFT-LCD-SCALER)	1.000000
4----	YIB0A0	IC NJM2561F1	VIDEO AMP (MPT6)	1.000000
4----	YI62A0	IC ST72F321 MICOM	ST72F321 MICOM	1.000000
4----	YI78A0	IC MP1591DS	32V 2A Step Down (SOIC8)	1.000000
4----	YI82A0	IC MP1015EM	CCFL DRIVER (TSSOP20)	1.000000
4----	YI99A0	IC MST9883	TFT LCD Display (LQFP80)	1.000000
4----	YK01A0	CAP CE CS (1608)50V 103PF	MCH185C103K	14.000000
4----	YK03A0	CAP CE CS (1608)25V 104PF	MCH182CN104KK	52.000000
4----	YK06A0	CAP CE CS (1608)50V 223PF	MCH185C223K	1.000000
4----	YK07A0	CAP CE CS (1608)16V 474PF	EMK107BJ474K-T	1.000000
4----	YK09A0	CAP CE CS (1608)50V 152K	MCH185C152K	1.000000
4----	YK11A0	CAP CE CS (1608)50V 22PF	C1608C0G1H220JT	4.000000
4----	YK28A0	CAP CE CS (1608)50V 27PF	MCH185A270KK	2.000000
4----	YK29A0	CAP CE CS (1608)50V 331PF	MCH185A331J	8.000000
4----	YK36A0	CAP CE CS (1608)50V 472PF	C1608X7R1H472KT	1.000000
4----	YK43A0	CAP CE CS (1608)50V 182PF	UMK107B182KZ-T	1.000000
4----	YK48A0	CAP CE CS (4520)3KV 10PF	C4520COG3F100F	1.000000
4----	YK50A0	CAP CE CS (1608)50V 51PF	MCH185A510J	1.000000
4----	YL16A0	LED BLUE CHIP 1608	IWS-164-BXWF-B	6.000000
4----	YL17A0	LED BLUE CHIP SIDE VIEW	IWS-298-UB	4.000000
4----	YN02A0	CAP TANTAL 16V 10uF A (32	TMCMA1C106MTRF	4.000000
4----	YN08A0	CAP TANTAL 35V 1uF	A (3216)TYPE	3.000000
4----	YN12A0	CAP TANTAL 16V 22uF	B (3528)TYPE	2.000000
4----	YN19A0	CAP TANTAL 10V 100uF C (6	C (6032)TYPE 10V 100uF	2.000000
4----	YN20A0	CAP TANTAL 20V 47UF	D (7343)TYPE	5.000000
4----	YS21A0	SWH TACT YTP-1100E	YTP-1100E	4.000000
4----	YT02A0	TR CS 2SC5001	20V 10A LOW VCE (CPT3)	1.000000
4----	YT04A0	TR CS MMST2222A	KTN2222AS (SMT3)	1.000000
4----	YT05A0	TR CS MMST2907A	KTN2907AS (SMT3)	2.000000
4----	YT14A0	TR CS KRA110S	ROHM DTA143TK (SOT-23)	1.000000
4----	YV02A0	RES CFCS (1608) 1/10 8.2K	MCR03EZH J822	1.000000
4----	YV03A0	RES CFCS (1608) 1/10 20K	MCR03EZHJ203	2.000000
4----	YV04A0	RES CFCS (1608) 1/10 18K	MCR03EZH J183	1.000000
4----	YV06A0	RES CFCS (1608) 1/10 68K	MCR03EZHJ683	1.000000
4----	YV07A0	RES CFCS (1608) 1/10 2.7K	MCR03EZHJ 272	1.000000
4----	YV08A0	RES CFCS (1608) 1/10 100	MCR03EZH J101	4.000000
4----	YV10A0	RES CFCS (1608) 1/10 470	MCR03EZHJ471	1.000000
4----	YV12A0	RES CFCS (1608) 1/10 15K	MCR03EZH J153	1.000000
4----	YV14A0	RES CFCS (1608) 1/10 75	MCR03EZHJ 750	8.000000
4----	YV21A0	RES CFCS (1608) 1/10 1M	MCR03EZH J105	1.000000
4----	YV22A0	RES CFCS (1608) 1/10 6.8K	MCR03EZH J682	1.000000

4----	YV24A0	RES CFCS (1608) 1/10 680	MCR03EZH J681	1.000000
4----	YV25A0	RES CFCS (1608) 1/10 10	MCR03EZHJ 100	1.000000
4----	YV30A0	RES CFCS (1608) 1/10 3.3K	MCR03EZH J332	1.000000
4----	YV41A0	RES CFCS (1608) 1/10 1.8K	MCR03EZH J182	3.000000
4----	YV48A0	RES CFCS (1608) 1/10 2K	MCR03EZHJ 202	1.000000
4----	YV58A0	RES CFCS (1608) 1/10 300K	MCR03EZH J 304	2.000000
4----	YZ28A0	BUZZER CSM9027A	CCTECH (SMT TYPE)	1.000000
3-----	YZ27B0	TRANS INVERTER CM703WLI	DC/AC (29.1X13.0X6.0) SMD	1.000000
2-----	VY15A0	SRW BH T1 2X10 BK	BH T1 2X10 BK	2.000000
2-----	VY41A0	SRW CH M2X2.2 (BK)	CH M2X2.2 (BK)	4.000000
2-----	YA60B0	LENS CDS	DAH-700M	1.000000
2-----	YE18A0	FLAT CABLE 40P (60m/m)	40PX60XP7X0.5 (TFT)	1.000000
2-----	YG88A0	CUSHION CDS A	EVA (2.5X8.5X5T)	1.000000
2-----	YG95C0	CUSHION BUTTON	EVA (9.5X3.5X3.0t)	2.000000
2-----	YIB6C0	TFT PANEL CVR	ABS BLACK/BLACK SPRAY	1.000000
2-----	YIF0A0	DECORATION PLT TFT	ABS BLACK/MATALIC GRAY SPRAY	1.000000
2-----	YK45A0	TFT LCD 7.0 inch TX18D11V	HITACHI DIGITAL	1.000000
2-----	YR10A0	SRW BH T2 2X15 (BK)	BH T2 2X15 (BK)	2.000000
2-----	YR11A0	SRW CM T2 2X4 (BK)	CM T2 2X4 (BK)	4.000000
2-----	YS70A0	BUTTON TFT 'E' (ASPECT/IN	PC MILK	1.000000
2-----	YZ44A0	TOUCH SCREEN PANEL	H6070-NCOFB87 (7inch)	1.000000
2-----	YZ48A0	TAPE TOUCH GRASS SELT	3X160X0.25T	2.000000
2-----	YZ48B0	TAPE TOUCH GRASS SELT	3X96X0.25T	2.000000
2-----	YZ57A0	TAPE LCD DECORATION (DOUB	DAV-727D (PI 4X0.1T)	4.000000
2-----	YZ58A0	TAPE TFT DECORATION (DOUB	DAV-727D (3X20X0.1T)	2.000000
2-----	YZ59A0	TAPE TFT BUTTON E (SONY B	DAV-727D	1.000000
2-----	YZ61A0	TAPE BLACK MONITOR	30.5X32	2.000000
1-----	Y474A1	ASS'Y TV TUNER BOX (PAL)	DAV-727D (PAL)	1.000000
2-----	YP27A0	CVR UPPER TV TUNER (BLACK	SECC 0.8TX165X113	1.000000
2-----	YP28A0	CVR UNDER TV TUNER (BLACK	SECC 0.8TX85X132	1.000000
2-----	YR13A0	SRW BH M 2.6X4 BK	BH M 2.6X4 BK	3.000000
2-----	Y475A1	ASS'Y TV TUNER PCB (PAL)	DAV-727D (PAL)	1.000000
3-----	VE16A0	CAP EL TR 16V 100 SHL	P2.5	1.000000
3-----	VW18A0	WIRE #28 ORG 50M/M 2-2	#28 ORG 50M/M 2-2	1.000000
3-----	VZ66A0	SOCKET 8P MINI DIN	EXT. (TV BOX)	1.000000
3-----	YC22A0	COIL SPRING (SP-2520)	1 1/2Ts, 0.35PIE	1.000000
3-----	YC23A0	COIL SPRING (SP-2521)	4 1/2Ts, 0.35PIE	2.000000
3-----	YC24A0	COIL SPRING (SP-2522)	5 1/2Ts, 0.35PIE	2.000000
3-----	YC25A0	COIL SPRING (SP-2524)	9 1/2Ts, 0.35PIE	1.000000
3-----	YZ32E0	TUNER TV (PAT17MA) MULTI	MULTI (PAL)	1.000000
3-----	YZ42A0	JACK PHONE (DKE-13000GOLD	DIVERSITY ANT	4.000000
3-----	Y476A1	ASS'Y TV TUNER PCB CHIP (	DAV-727D (PAL)	1.000000

4----	DC01U0	INDUCTOR CS FCI2012-3R3K	3.3uH	1.000000
4----	DK02A0	CAP CE CS (1608)50V 561PF	MCH185A561J	1.000000
4----	DK04U0	CAP CE CS (1608)16V 105PF	C1608X5R1C105K	2.000000
4----	DV03A0	RES CFCS (1608) 1/10 47	MCR03EZH J 470	2.000000
4----	KE70A0	CAP EL CS RV2-16V101M	16V 100uF D6.3 L5.3SMD	3.000000
4----	KK03A0	CAP CE CS (1608)50V 820PF	UMK107CH821JW	1.000000
4----	KK05A0	CAP CE CS (1608)50V 12PF	MCH185A120JK	1.000000
4----	KK15A0	CAP CE CS (1608)50V 5PF	MCH185A050J	1.000000
4----	KV05A0	RES CFCS (1608) 1/10 560	MCR03EZH J561	1.000000
4----	KV06A0	RES CFCS (1608) 1/10 47K	MCR03EZH J 473	4.000000
4----	KV07A0	RES CFCS (1608) 1/10 2.2K	MCR03EZH J222	5.000000
4----	KV10A0	RES CFCS (1608) 1/10 100K	MCR03EZH J 104	1.000000
4----	KV11A0	RES CFCS (1608) 1/10 10K	MCR03EZH J 103	5.000000
4----	KV12A0	RES CFCS (1608) 1/10 33K	MCR03EZHJ 333	1.000000
4----	KV16A0	RES CFCS (1608) 1/10 220	MCR03EZH J 221	1.000000
4----	KV17A0	RES CFCS (1608) 1/10 4.7K	MCR03EZH J 472	2.000000
4----	KV20A0	RES CFCS (1608) 1/10 0	MCR03EZH J 0R0	7.000000
4----	PT03A0	TR CS DTA123JK	DTA123JK	4.000000
4----	YB14A0	PCB TV TUNER BOX (DAV-720	FR-4 1.2t	1.000000
4----	YC20A0	INDUCTOR CS WD7045-150K	15uH 2A (7.0X7.0X4.5)	1.000000
4----	YC26A0	INDUCTOR CS WD7032-101K	100uH 0.6A (7.0X7.0X3.2)	1.000000
4----	YD03A0	DID /S CS DAN235U	BAND SWH (UMD3)	2.000000
4----	YD05A0	DID /STK CS RB160L-40	Schottky barrier (PMDS)	1.000000
4----	YD15A0	DID /S CS DAN217	ARRAY DID (SMD3)	1.000000
4----	YI26A0	IC AN7299S	TV ANT DIVERSITY NTSC (SOP24)	1.000000
4----	YI78A0	IC MP1591DS	32V 2A Step Down (SOIC8)	1.000000
4----	YK01A0	CAP CE CS (1608)50V 103PF	MCH185C103K	8.000000
4----	YK02A0	CAP CE CS (1608)50V 222PF	MCH185CN222KK	1.000000
4----	YK03A0	CAP CE CS (1608)25V 104PF	MCH182CN104KK	1.000000
4----	YK07A0	CAP CE CS (1608)16V 474PF	EMK107BJ474K-T	3.000000
4----	YK10A0	CAP CE CS (1608)50V 10PF	MCH185A100DK	1.000000
4----	YK21A0	CAP CE CS (1608)50V 102PF	MCH185C102K	2.000000
4----	YK22A0	CAP CE CS (1608)50V 101PF	MCH185A101J	5.000000
4----	YK27A0	CAP CE CS (1608)50V 221PF	MCH185CA221J	4.000000
4----	YK33A0	CAP CE CS (1608)50V 562PF	MCH185CN562KK	3.000000
4----	YK36A0	CAP CE CS (1608)50V 472PF	C1608X7R1H472KT	1.000000
4----	YK41A0	CAP CE CS (1608)16V 124PF	EMK107BJ124K-T	1.000000
4----	YK53A0	CAP POS 16V 10UF	16TQC 10M (3528)	1.000000
4----	YN02A0	CAP TANTAL 16V 10uF A (32	TMCMA1C106MTRF	3.000000
4----	YN08A0	CAP TANTAL 35V 1uF	A (3216)TYPE	3.000000
4----	YN13A0	CAP TANTAL 16V 47uF	C (6032)TYPE	1.000000
4----	YO06A0	SEMI VR 47K CHIP	PVZ3A473A01R00	1.000000

4----	YO07A0	SEMI VR 100K CHIP	PVZ3A104A01R00	1.000000
4----	YT05A0	TR CS MMST2907A	KTN2907AS (SMT3)	1.000000
4----	YV07A0	RES CFCS (1608) 1/10 2.7K	MCR03EZHJ 272	1.000000
4----	YV08A0	RES CFCS (1608) 1/10 100	MCR03EZH J101	2.000000
4----	YV10A0	RES CFCS (1608) 1/10 470	MCR03EZHJ471	1.000000
4----	YV14A0	RES CFCS (1608) 1/10 75	MCR03EZHJ 750	1.000000
4----	YV32A0	RES CFCS (1608) 1/10 3.9K	MCR03EZHJ 392	1.000000
4----	YV34A0	RES CFCS (1608) 1/10 51K	MCR03EZH J513	2.000000